


Tube To Tubesheet

TTS Serie

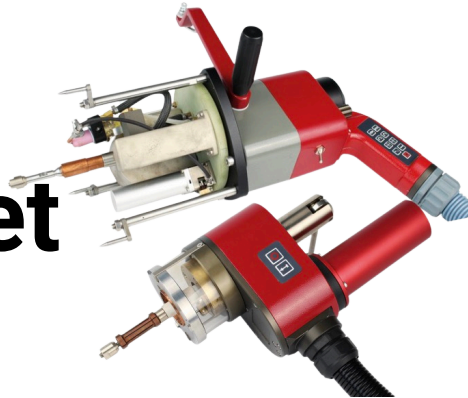

The tube-to-tubesheet weld heads from Orbitalservice have outstanding features: The special design make it easy to handle while maintaining a high level of efficiency and functionality. Its efficient liquid cooling system contributes to its high durability. Several thousand weld seams can be produced with constant quality with these tube-to-tubesheet orbital welding heads.


MADE FOR THE HEAT EXCHANGERS

Our TTS heads have become an indispensable method for welding heat exchangers, offering unparalleled quality, consistency, and automation for tube-to-tube sheet welds. Its precision, particularly in industries that require high-pressure and high-temperature systems, makes it the ideal choice for producing durable and reliable heat exchangers.



CONSISTENT QUALITY AND PRECISION

Ensuring consistent quality in heat exchanger welding is essential to maintain the performance, safety, and longevity of the heat exchanger. Welding is a critical process in the construction and repair of heat exchangers because the welded joints need to withstand high pressures, temperatures, and corrosive environments. These are the reason why, our TTS welding heads are being used.

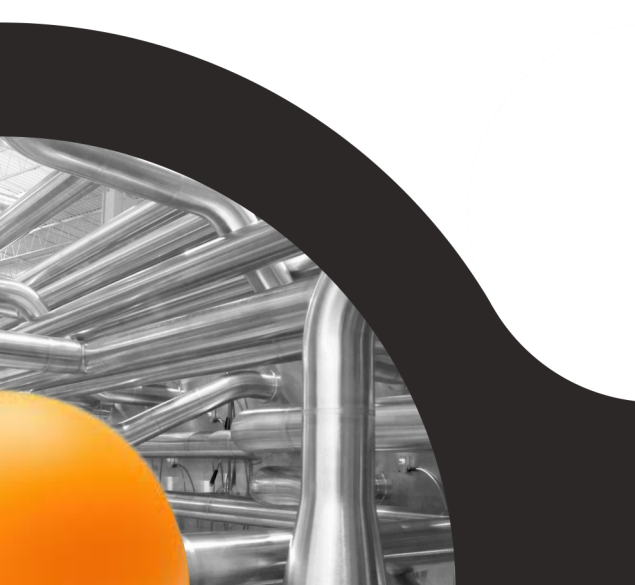



MADE IN GERMANY

Tube To Tubesheet


TTS 40



FEATURES

- Tube to tube sheet welding without filler wire
- Commonly used for stainless steel, titanium and nickel alloy tube to tube sheet welding
- Small, light and simple operation
- Uses localized guide for self-centering with optional spring balancer
- Expandable centering mandrel designed for precise positioning
- Enhanced water cooling system and high duty cycle for durability

Pneumatic clamping function
available as an option




Heavy Duty water cooling function
available as an option

PRODUCT DETAILS

Tube ID min-max	16 mm - 38 mm 0.63" - 1.5"
Electrode diameter	1.6 mm - 2.4 mm 0.063" - 0.078"
Weight	3.5 kg / 8 lbs w/o hose
Hose package length	12 m 40 ft

DIMENSIONS

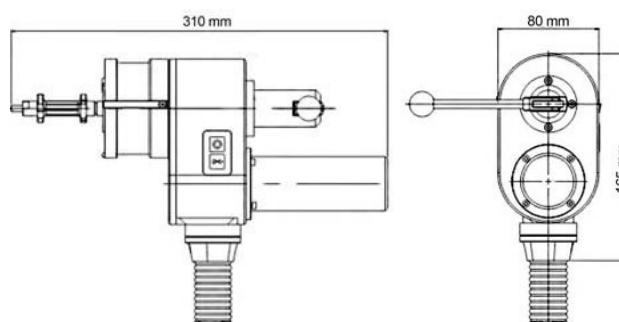

ORBITALSERVICE®
THE FUTURE OF ORBITAL WELDING, TODAY AND TOMORROW

+49 (0)6092 822 940
info@orbitalservice.de



MADE IN GERMANY

Tube To Tubesheet

TTS 90




FEATURES

- With cold wire unit (with rotating) for TIG-DC welding
- Continuous rotation possible without twisting the cold wire
- Pneumatic clamping system
- Eroded clamping cartridge
- Head can be mounted on a balancer
- Suitable for steel, stainless steel and nickel-based alloys
- For flush tubes, recessed (1 mm) and protruding (5 mm) tubes
- Cooled up to the clamping cartridge
- Tungsten angle adjustable (0° to 30°)

PRODUCT DETAILS

Tube ID min-max	12 mm - 90 mm 0.47" - 3.54"
Electrode diameter	1.6 mm - 2.4 mm 0.063" - 0.078"
Weight	13 kg / 28 lbs w/o Hose
Hose package length	8 m 26 ft
Wire	0.8 mm - 1 mm


Arc Voltage Control as an option

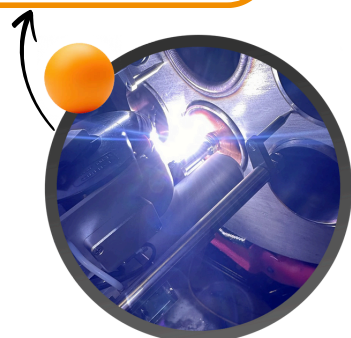

Manipulator as an option



DIMENSIONS

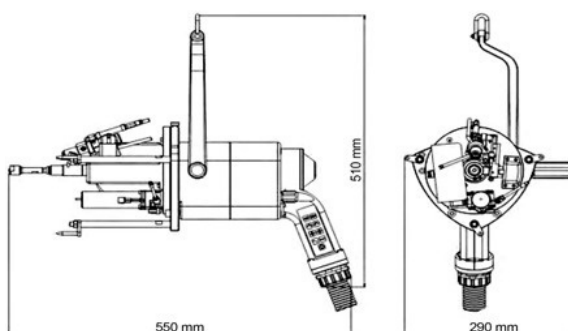

ORBITALSERVICE®
THE FUTURE OF ORBITAL WELDING. TODAY AND TOMORROW

+49 (0)6092 822 940
info@orbitalservice.de